

Key Features:

- 10.1" 1280 x 800 400 nits
- Front IP65 for dust and water ingress protection
- PCAP multi-touch supports up to 10-point touch
- Compact, sleek and elegant design for any professional environment
- Integrated ZEBRA SE3307WA
- Integrated cable organizer
- Product Longevity and Revision Control



Specifications

Model Name		CM-CE101P40WX
Part Number		22061
Display and Touch		
LCD Size / Type	10.1” TFT LCD	
Panel Ratio	16:10	
Max. Resolution	1280 x 800 (Pixel)	
Typ. Brightness	400 nits (TFT LCD panel) 320 nits (with touch panel)	
Contrast Ratio	800:1	
Backlight	WLED	
Backlight Life	30,000 hrs	
Display Colors	16.7 M	
Viewing Angle	170 /170 (H / V)	
Response Time	25 ms (typ.)	
Frequency (H)	45 KHz	
Frame Rate	56 – 75 Hz	
Touch Technology	Projected Capacitive (PCAP)	
Multi-Touch Input	Up to 10 points	
Input Method	Finger, Thin Glove	
Interface	USB 2.0 Type B	
Multi-Touch OS Support	Win 7, Win 8, Win 10, Linux & Mac OSX	
Single-Touch OS Support	Win 7, Win 8, Win 10, Linux & Mac OSX	
Interface		

Model Name	CM-CE101P40WX
Part Number	22061
HDMI	x1
USB-A (device)	x1
USB-B (host)	x1
DC Power (2.5mm)	x1
Speaker	1W x 2
Power Requirements	
Power input	DC 12V, 1.6A
AC adapter	20W, 100-240V AC, 50/60Hz
Scanner Module ²	
Inner Scanner Module	ZEBRA SE3307WA
Scanner Resolution	752 x 480 pixels
Aiming LED	617 nm LED, dot optical power: 0.19 mW (typ.)
Laser Classification	Intended for use in CDRH Class II/ IEC 825 Class 1M devices
Physical Properties	
Dimensions (WxDxH)	264.04 x 186.48 x 29.9 (mm)
Net Weight	0.9 Kg (1.98 lbs) ¹
Gross Weight	1.26 Kg (2.77 lbs) ¹
Mounting	75 mm x 75 mm VESA
Chassis Color	White (default) / Black (optional)
Environment	
Operating Temperature	0 to 50 °C
Storage Temperature	0 to 50 °C
Operating Humidity (RH)	95% (non-condensing)
Front IP Rating	IP65
Regulatory Certifications	
EMC & Safety	Standard: FCC, CCC


1. Actual weight varies by configurations and optional accessories

2. For more detailed specifications of ZEBRA scanner, please refer to SE330X Specification.



AVAILABLE MODELS	
PART NO.	DESCRIPTION
22061	10.1" 1280x800, 400nits PCAP Touch Display with integrated ZEBRA scanner and USB cable, 0 °C ~ 50 °C
PACKING LIST	
Qty.	DESCRIPTION
x 1	10.1" 1280x800, 400nits PCAP Touch Display with integrated ZEBRA scanner and USB cable, 0 °C ~ 50 °C

Mechanical Drawing

Images

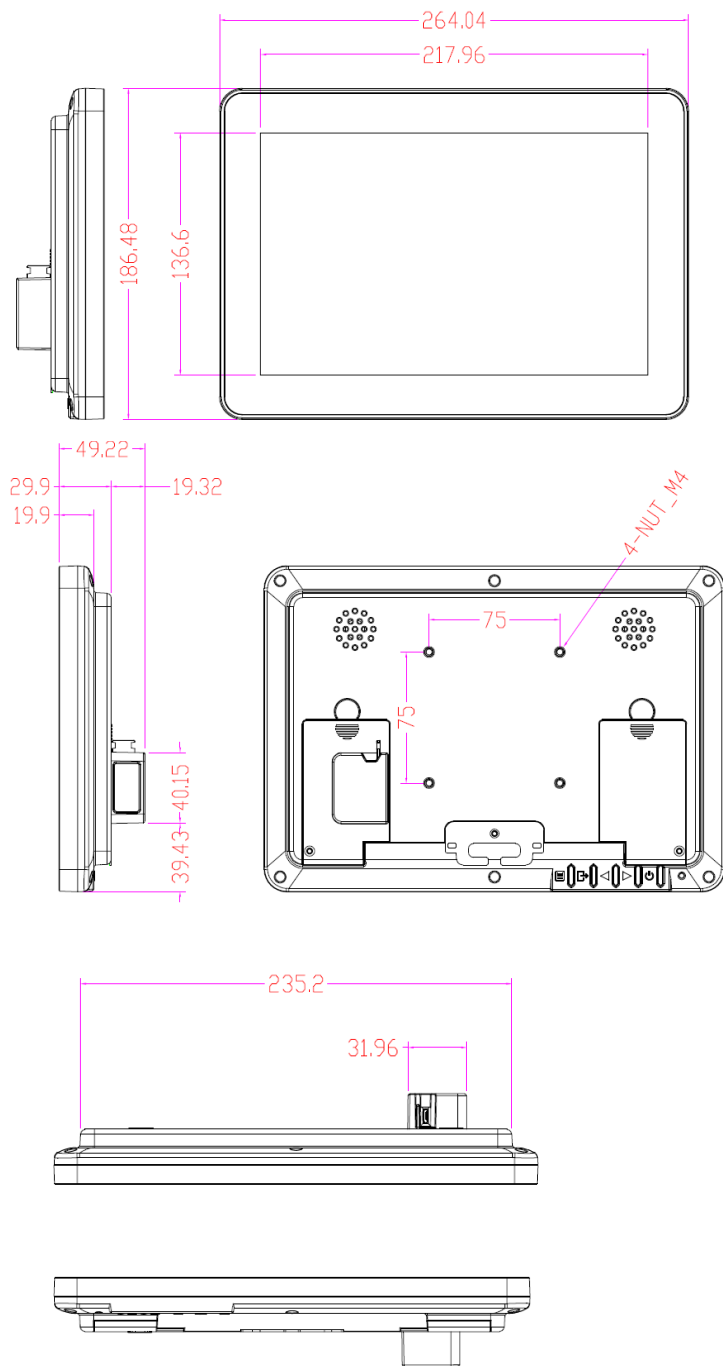

Tablet Housing Also Available In Twilight Gray

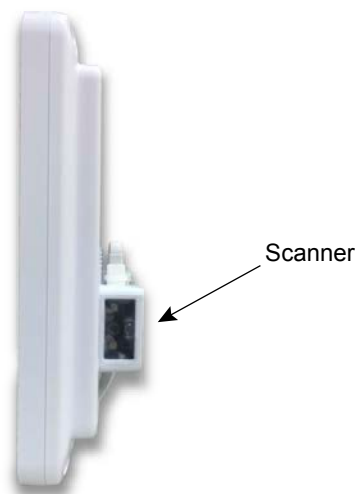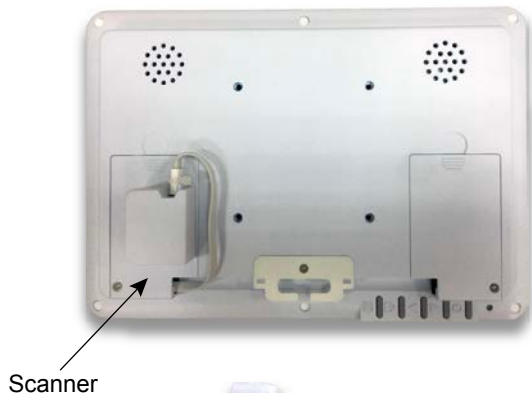

Dolphin Data Capture

18-05 215th Street • Suite 11E • Bayside, NY 11360 • P: 516.405.3990